

Balancing valves, stainless steel, reduced bore


240/MM series, welding / welding, NS-norm, DN 65-100, reduced bore

Body	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Ball seal	DN 65-100 PTFE+GF
Stem	DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404)
Stem seal	DN 65-100 FPM/NBR
Measuring block	DN 65-100 Type Oras, stainless steel, X2CrNiMo17-12-2 (1.4404) / NBR
Operation	DN 65-100 With zinc-plated steel handle




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

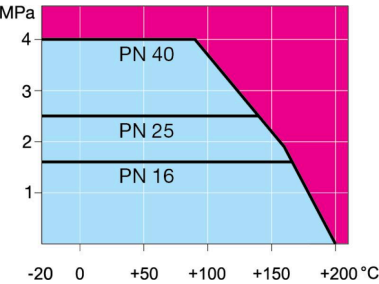

Not for steam

DN 65-100

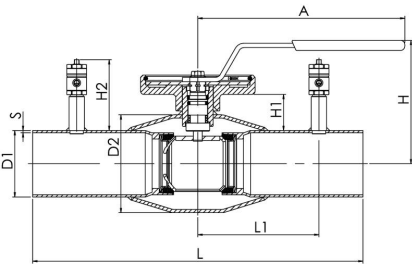

DN	PN	Product no.	A	D1	D2	H	H1	H2	L	L1	S	kg
65	25	240065/MM	280	70.0	114.3	154	55	82	300	110	3	4.4
80	25	240080/MM	280	86.0	114.3	166	59	82	300	110	3	5.4
100	25	240100/MM	280	106.0	139.7	173	56	82	325	122.5	3	7.7

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.