


Gas ball valves, reduced bore

110 series, welding / welding, EN (DIN), DN 65-250, reduced bore

Body	DN 65-250 Steel, P235GH (1.0345)
Ball	DN 65-250 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 65-250 PTFE+C
Stem	DN 65-250 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 65-250 NBR
Operation	DN 65-250 With zinc-plated steel handle

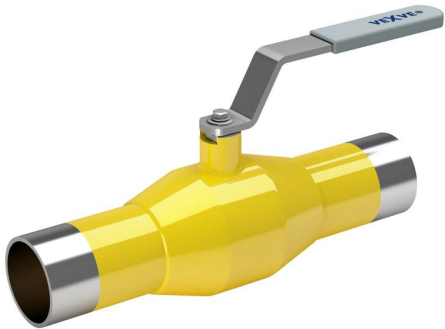


Operation conditions
-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)




Not for steam

DN 65-150

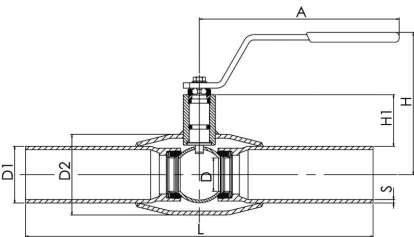

DN 200-250

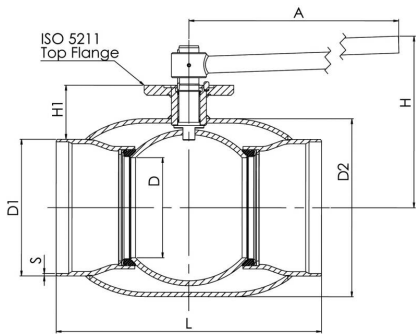

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
65	25	110065	277,5	50	76.1	101.6	159	62	300	2,9	4.0
80	25	110080	277,5	65	88.9	121.0	171	68	300	3,2	5.3
100	25	110100	278,5	80	114.3	146.0	218	101	325	3,6	8.3
125	25	110125	400	100	139.7	177.8	252	101	325	4	13.4
150	25	110150	600	125	168.3	219.1	272	107	350	4,5	18.0
200	25	110200	870	150	219.1	273.0	280	92	400	4.5	39.0
250	25	110250	1200	200	273.0	355.6	350	108	530	5	74.0

For more information contact our customer service.

Gas ball valves, reduced bore


110 series, welding / welding, EN (DIN), DN 300-500, reduced bore

Body	DN 300-500 Steel, P235GH (1.0345)
Ball	DN 300-500 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 300-500 PTFE+C
Stem	DN 300-500 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 300-500 NBR
Operation	DN 300-500 Valves are available with manual gear or with an electric or hydraulic actuator




Operation conditions

-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

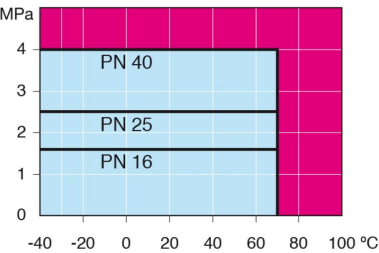

Not for steam

DN 300-500

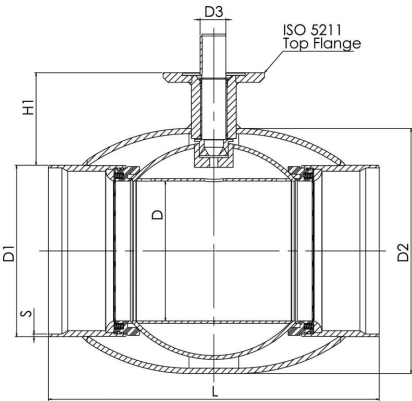

DN	PN	Product no.	D	D1	D2	D3	H1	L	S	kg
300	25	110300	250	323.9	457.0	50.0	133	550	5.6	110.0
350	25	110350	290	355.6	508.0	50.0	192	686	6,3	170.0
400	25	110400	340	406.4	610.0	70.0	242	762	7	250.0
500	25	110500	390	508.0	660.0	90.0	259	914	7	400.0

For more information contact our customer service.