


X-stainless steel ball valves, reduced bore

235X series, X-series, flange / welding, EN (DIN), DN 15-50, reduced bore


Body	DN 15-50 Stainless steel, AISI316L (1.4404)
Ball	DN 15-50 Stainless steel, AISI316L (1.4404)
Ball seal	DN 15-50 PTFE+C
Stem	DN 15-50 Stainless steel, AISI316L (1.4404)
Stem seal	DN 15-50 FPM/NBR
Operation	DN 15-50 with composite handle
Flanges	EN 1092-1
	Available PN 10, 16, 25, 40



Operation conditions
-20 ° – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

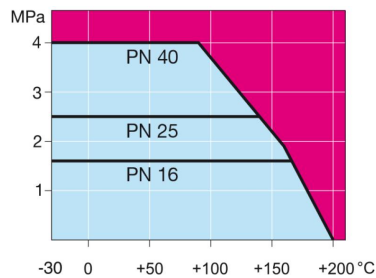

DN 15-50

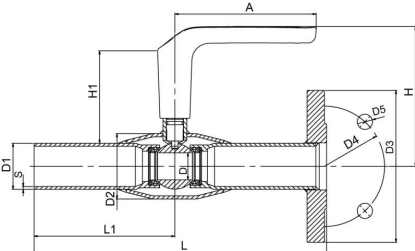

DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	kg
15	40	235015X	130	10	21.3	33.7	95.0	65.0	14.0	119	86	240	115	2	1.1
20	40	235020X	130	15	26.9	42.4	105.0	75.0	14.0	123	87	240	115	2	1.5
25	40	235025X	130	20	33.7	48.3	115.0	85.0	14.0	125	86	240	115	2	1.8
32	40	235032X	130	25	42.4	60.3	140.0	100.0	18.0	129	85	270	130	2	2.9
40	40	235040X	130	32	48.3	70.0	150.0	110.0	18.0	133	87	270	130	2.6	3.6
50	40	235050X	130	40	60.3	76.1	165.0	125.0	18.0	140	88	310	150	2.6	4.9