


Gas ball valves, full bore

304/GS series, welding / welding, GOST, DN 200-400, full bore

Body	DN 200-400 Steel, P235GH (1.0345)
Ball	DN 200-400 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 200-400 PTFE+C
Stem	DN 200-400 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 200-400 NBR
Operation	DN 200 With zinc-plated steel handle DN 250-400 Valves are available with manual gear or with an electric or hydraulic actuator

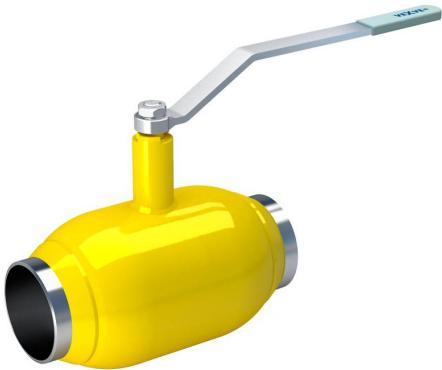


Operation conditions
-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)




Not for steam

DN 50-125

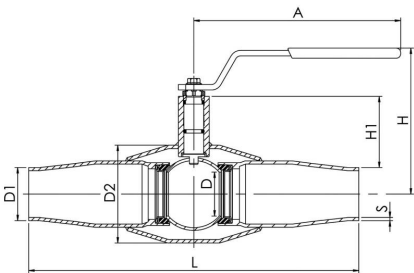

DN 150-400



DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
200	25	304200/GS	1200	200	219.0	355.6	343	135	530	5,0	95.0
250	25	304250/GS		250	273.0	457.0		158	550	6	126.0
300	25	304300/GS		290	325.0	508.0		206	686	7	177.0
350	25	304350/GS		340	377.0	610.0		267	762	7,0	258.0
400	25	304400/GS		390	426.0	660.0		309	1100	7,0	519.0