


# Stainless steel ball valves, reduced bore


230/MM series, welding / welding, NS-norm, DN 65-100, reduced bore

|           |                                                     |
|-----------|-----------------------------------------------------|
| Body      | DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Ball      | DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Ball seal | DN 65-100 PTFE+C                                    |
| Stem      | DN 65-100 Stainless steel, X2CrNiMo17-12-2 (1.4404) |
| Stem seal | DN 65-100 FPM/NBR                                   |
| Operation | DN 65-100 With zinc-plated steel handle             |

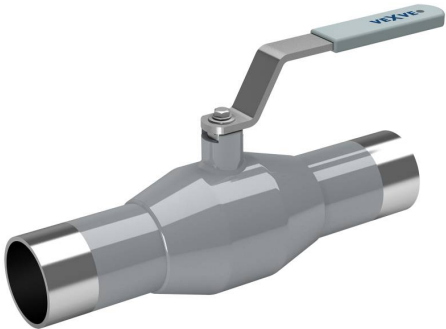


Operation conditions  
-20 °C – +200 °C  
Below -20 °C contact manufacturer  
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

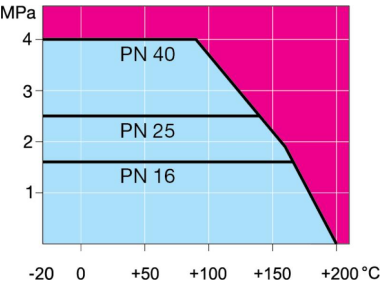

Not for steam

DN 65-150

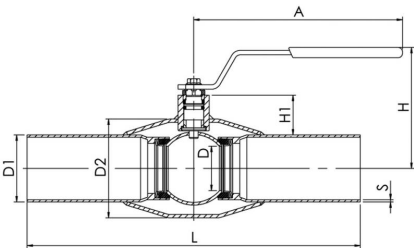

| DN  | PN | Product no. | A   | D  | D1    | D2    | H   | H1 | L   | S   | kg  |
|-----|----|-------------|-----|----|-------|-------|-----|----|-----|-----|-----|
| 65  | 25 | 230065/MM   | 278 | 50 | 70.0  | 114.3 | 150 | 55 | 300 | 3,0 | 3.8 |
| 80  | 25 | 230080/MM   | 278 | 65 | 86.0  | 114.3 | 160 | 59 | 300 | 3,1 | 4.7 |
| 100 | 25 | 230100/MM   | 278 | 80 | 106.0 | 139.7 | 171 | 59 | 325 | 3,0 | 6.7 |