

X-gas ball valves, reduced bore


115X series, X-series, flange / welding, EN (DIN), DN 15-50, reduced bore

Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+C
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 FPM/NBR
Operation	DN 15-50 with composite handle
Flanges	EN 1092-1
	Available PN 10, 16, 25, 40




Operation conditions

-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

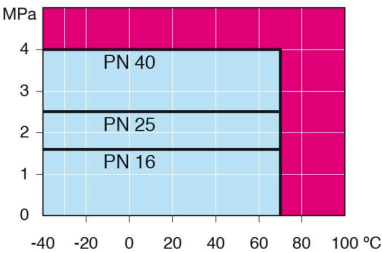

Not for steam

DN 15-50

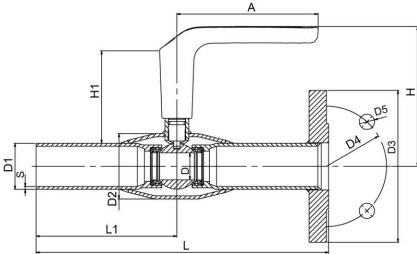

DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	kg
15	40	115015X	130	10	21.3	33.7	95.0	65.0	14.0	119	86	240	115	2	1.2
20	40	115020X	130	15	26.9	42.4	105.0	75.0	14.0	123	87	240	115	2.3	1.7
25	40	115025X	130	20	33.7	48.3	115.0	85.0	14.0	125	86	240	115	2.6	1.9
32	40	115032X	130	25	42.4	60.3	140.0	100.0	18.0	129	85	270	130	2.6	3.0
40	40	115040X	130	32	48.3	70.0	150.0	110.0	18.0	133	87	270	130	2.6	3.4
50	40	115050X	130	40	60.3	76.1	165.0	125.0	18.0	140	88	310	150	2.9	4.5