

Shut-off butterfly valves, reduced bore

BRS W1/GS series, Δp = 16 bar, welding / welding, GOST, DN 900-1400, reduced bore


Body	DN 900-1400 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408) DN 1200-1400 Stainless steel, GX2CrNiMoN22-5-3 (1.4470)
Seat	DN 900-1400 1.4542 + HCr plating
Stem	DN 900-1400 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1400 FPM
Bearing	DN 900-1400 PTFE + AISI 316 net
Operation	DN 900-1400 Valve is equipped with manual gear




Operation conditions

Body:	PN 25
Trim:	Δp = 16 bar
Temperature:	-40 °C – +200 °C DN 1200–1400: -20 °C – +200 °C Below 0 °C contact manufacturer
Leakage rate:	A (EN 12266-1)
Not for steam	

DN 900-1400

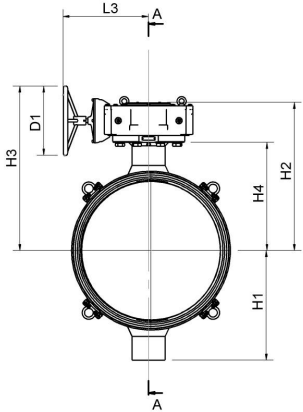

DN 900-1400

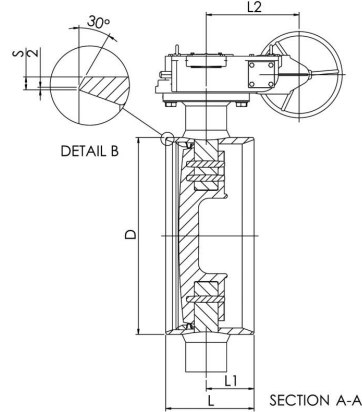

DN	PN	Product no.	D	D1	H1	H2	H3	H4	L	L1	L2	L3	S	kg
900	16	BRS900W1/GS	920	400.0	631	853	948	623	510	221	256	505	14	1120.0
1000	16	BRS1000W1/GS	1020	400.0	678	919	1014	689	550	224	256	506	15	1440.0
1200	16	BRS1200W1/GS	1220	500.0	730	1157	1273	856	580	285	250	632	15	2278.0
1400	16	BRS1400W1/GS	1420	630.0	871	1272	1456	963	600	228	250	636	18	2885.0