

Shut-off butterfly valves, reduced bore

BRS F1 series, Δp = 16 bar, flange / flange, DN 900-1000, reduced bore


Body	DN 900-1000 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1000 1.4542 + HCr plating
Stem	DN 900-1000 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1000 FPM
Bearing	DN 900-1000 PTFE + AISI 316 net
Operation	DN 900-1000 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 16




Operation conditions

Body:	PN 25
Trim:	Δp = 16 bar
Temperature:	-20 °C – +200 °C Below 0 °C contact manufacturer
Leakage rate:	A (EN 12266-1)
Not for steam	

DN 900-1000

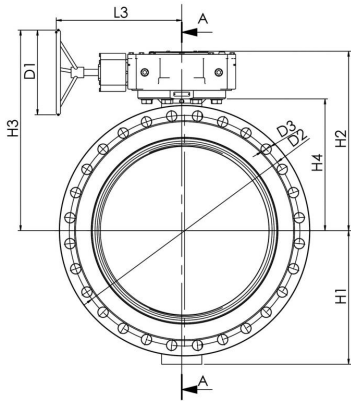

DN 900-1000

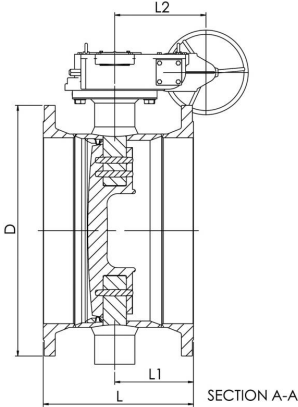

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	L	L1	L2	L3	kg
900	16	BRS900F1	1125	400.0	1050.0	39.0	631	853	948	623	754	344	256	505	1420.0
1000	16	BRS1000F1	1255	400.0	1170.0	42.0	678	919	1014	689	832	365	256	506	1990.0