

X-gas ball valves, full bore


304X series, X-series, welding / welding, EN (DIN), DN 15-40, full bore

Body	DN 15-40 Steel, P235GH (1.0345)
Ball	DN 15-40 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-40 PTFE+C
Stem	DN 15-40 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-40 FPM/NBR
Operation	DN 15-40 with composite handle




Operation conditions

-40 °C – +70 °C
Over 70 °C contact manufacturer
Below -30 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

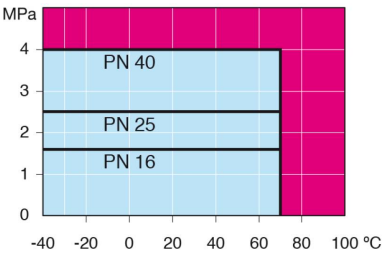

Not for steam

DN 15-40

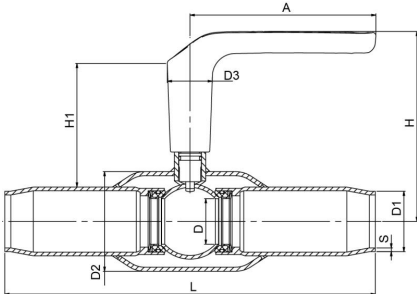

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	S	kg
15	40	304015X	130	15	21.3	42.4	32.0	123	87	230	2.3	1.3
20	40	304020X	130	20	26.9	48.3	32.0	125	86	230	2.6	1.3
25	40	304025X	130	25	33.7	60.3	32.0	129	85	260	2.6	1.9
32	40	304032X	130	32	42.4	70.0	32.0	133	87	260	2.6	2.2
40	40	304040X	130	40	48.3	88.9	32.0	140	88	300	2.9	3.1