

Balancing valves, steel, reduced bore

143/25 series, PN 25, flange / flange, DN 65-150, reduced bore

Body	DN 65-150 Steel, P235GH (1.0345)
Ball	DN 65-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 65-150 PTFE+GF
Stem	DN 65-150 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 65-150 FPM
Measuring block	DN 65-150 Type Oras, brass / NBR
Operation	DN 65-150 With zinc-plated steel handle
Flanges	EN 1092-1
	Available PN 10, 16, 25, 40




Operation conditions
-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)



Not for steam

DN 65-150

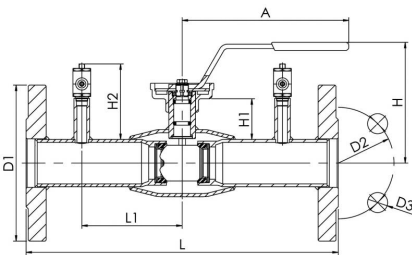

DN	PN	Product no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	25	143065/25	280	185.0	145.0	18.0	160	58	108	310	110	11.0
80	25	143080/25	280	200.0	160.0	18.0	173	64	108	310	110	14.0
100	25	143100/25	280	235.0	190.0	22.0	219	98	132	350	122.5	20.7
125	25	143125/25	400	270.0	220.0	26.0	253	100	130	360	137,5	31.3
150	25	143150/25	600	300.0	250.0	26.0	276	110	131	390	150	40.7

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.

Balancing valves, steel, reduced bore

14-3/25 series, PN 25, flange / flange, DN 200-300, reduced bore


Body	DN 200-300 Steel, P235GH (1.0345)
Ball	DN 200-300 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 200-300 PTFE+GF
Stem	DN 200-300 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 200-300 FPM
Measuring block	DN 200-300 Type Oras, brass / NBR
Operation	DN 200-300 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 10, 16, 25, 40



Operation conditions


-20 °C – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

Leakage rate A (EN 12266-1)

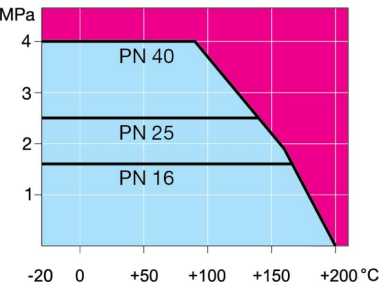


Not for steam

DN 200-300



DN 200-300



DN	PN	Product no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	25	143200/25	268	244	69	360.0	310.0	26.0	250.0	293	72	101	101	425	195	74.0
250	25	143250/25	301	294	97	425.0	370.0	30.0	300.0	345	88	107	107	550	256	120.0
300	25	143300/25	424	349	138	485.0	430.0	30.0	600.0	422	112	112	112	580	296	176.0

Vexve's balancing valves can be found e.g. from libraries of TA-SCOPE and SmartBalancing measuring devices.