

Control and shut-off butterfly valves, reduced bore

BRC F1 series, Δp = 16 bar, flange / flange, DN 900-1000, reduced bore


Body	DN 900-1000 Steel P355NL1 (1.0566) / P355QH1 (1.0571)
Disc	DN 900-1000 Stainless steel, GX5CrNiMo19-11-2 (1.4408)
Seat	DN 900-1000 1.4542 + HCr plating
Stem	DN 900-1000 Stainless steel, X3CrNiMoN27-5-2 (1.4460)
Stem seal	DN 900-1000 Graphite
Bearing	DN 900-1000 PTFE + AISI 316 net
Operation	DN 900-1000 Valve is equipped with manual gear
Flanges	EN 1092-1 Available PN 16




Operation conditions

Body:	PN 25
Trim:	Δp = 16 bar
Temperature:	-20 °C – +250 °C
Leakage rate:	A (EN 12266-1)

DN 900-1000

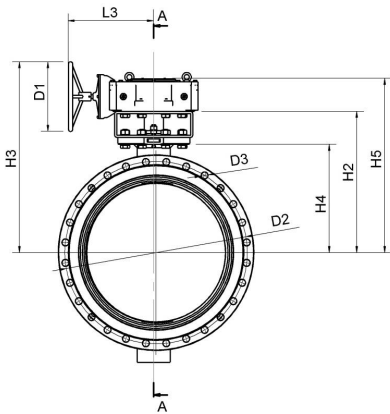

DN 900-1000

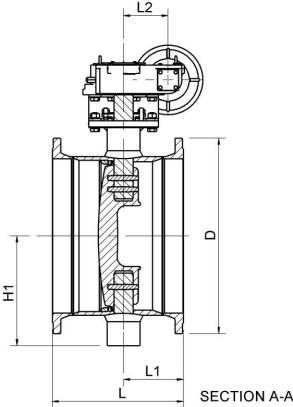

DN	PN	Product no.	D	D1	D2	D3	H1	H2	H3	H4	H5	L	L1	L2	L3	kg
900	16	BRC900F1	1125	400.0	1050.0	39.0	631	813	1098	623	1003	754	344	256	505	1480.0
1000	16	BRC1000F1	1255	400.0	1170.0	42.0	678	879	1164	689	1069	832	365	256	506	2054.0