



X-steel ball valves, full bore

150X series, X-series, welding / welding, EN (DIN), DN 15-40, full bore


Body	DN 15-40 Steel, P235GH (1.0345)
Ball	DN 15-40 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-40 PTFE+C
Stem	DN 15-40 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-40 FPM
Operation	DN 15-40 with composite handle

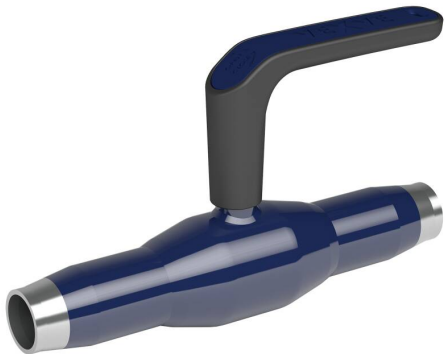

Operation conditions
-20 ° – +200 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

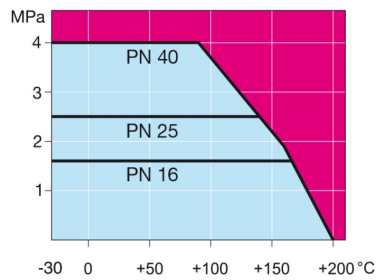

DN 15-40

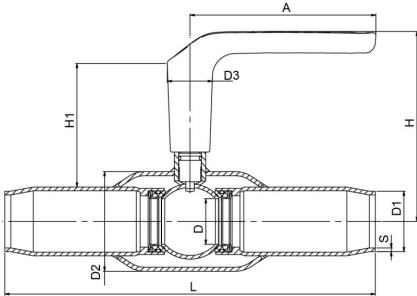

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	S	kg
15	40	150015X	130	15	21.3	42.4	32.0	123	87	230	2.3	1.3
20	40	150020X	130	20	26.9	48.3	32.0	125	86	230	2.6	1.3
25	40	150025X	130	25	33.7	60.3	32.0	129	85	260	2.6	1.9
32	40	150032X	130	32	42.4	70.0	32.0	133	87	260	2.6	2.2
40	40	150040X	130	40	48.3	88.9	32.0	140	88	300	2.9	3.1