

Injusteringsventiler, rostfritt stål, reducerat genomlopp

240/MM serie, svetsning / svetsning, NS-norm, DN 65-100, reducerat genomlopp

Ventilhus	DN 65-100 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-100 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-100 PTFE+GF
Spindel	DN 65-100 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-100 FPM/NBR
Mätuttag	DN 65-100 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 65-100 Med förzinkat stål handtag




Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

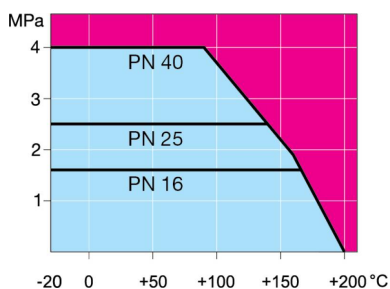

Ej för ånga

DN 65-100

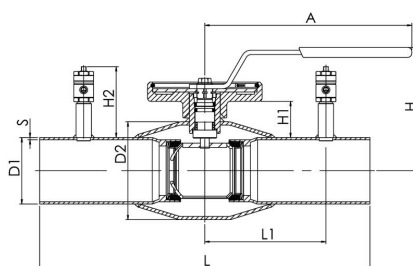

DN	PN	Product no.	RSK no.	A	D1	D2	H	H1	H2	L	L1	S	kg
65	25	240065/MM	4891358	280	70.0	114.3	154	55	82	300	110	3	4.4
80	25	240080/MM	4891359	280	86.0	114.3	166	59	82	300	110	3	5.4
100	25	240100/MM	4891360	280	106.0	139.7	173	56	82	325	122.5	3	7.7

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.