

Rostfria ståkulventiler, reducerat genomlopp

233/25 serie, PN 25, fläns / fläns, DN 65-250, reducerat genomlopp

Ventilhus	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-250 PTFE+C
Spindel	DN 65-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-250 FPM/NBR
Manövrering	DN 65-250 Med förzinkat stål handtag
Fläns	EN 1092-1
	Tillgänglig PN 10, 16, 25, 40



Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren

Lägst tillåtna omgivningstemperatur -40°C


Läckageklass A (EN 12266-1)



Ej för ånga

DN 65-150

DN 200-250

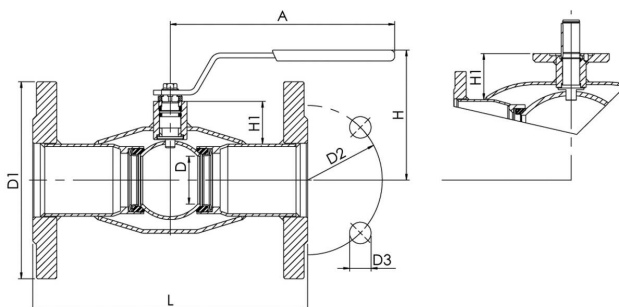

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	kg
65	25	233065/25	278	50	185.0	145.0	18.0	148	51	270	11.0
80	25	233080/25	278	65	200.0	160.0	18.0	159	58	280	13.3
100	25	233100/25	278	80	235.0	190.0	22.0	171	54	300	18.9
125	25	233125/25	400	100	270.0	220.0	26.0	220	68	325	27.7
150	25	233150/25	600	125	300.0	250.0	26.0	240	74	350	35.9
200	25	233200/25	870	150	360.0	310.0	26.0	280	92	400	59.0
250	25	233250/25	1200	200	425.0	370.0	30.0	340	108	550	105.0