

Injusteringsventiler, rostfritt stål, reducerat genomlopp

243 serie, fläns / fläns, DN 65-150, reducerat genomlopp

Ventilhus	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 65-150 PTFE+GF
Spindel	DN 65-150 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 65-150 FPM/NBR
Mätuttag	DN 65-150 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 65-150 Med förzinkat stål handtag
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40



Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)



Ej för ånga

DN 65-150

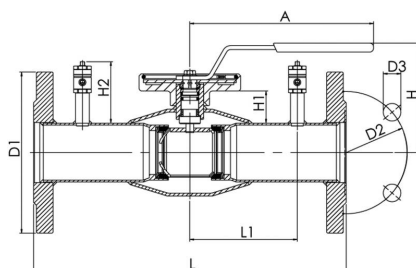

DN	PN	Product no.	RSK no.	A	D1	D2	D3	H	H1	H2	L	L1	kg
65	16	243065	4891367	280	185.0	145.0	18.0	148	58	82	310	110	10.1
80	16	243080	4891368	280	200.0	160.0	18.0	160	64	82	310	110	12.0
100	16	243100	4891369	280	220.0	180.0	18.0	173	52	82	350	122.5	15.9
125	16	243125	4891370	400	250.0	210.0	18.0	221	68	82	355	137.5	25.6
150	16	243150	4891371	600	285.0	240.0	22.0	240	74	82	370	150	30.0

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.

Injusteringsventiler, rostfritt stål, reducerat genomlopp


243 serie, fläns / fläns, DN 200-250, reducerat genomlopp

Ventilhus	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kula	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Kultätning	DN 200-250 PTFE+GF
Spindel	DN 200-250 Rostfritt stål, X2CrNiMo17-12-2 (1.4404)
Spindeltätning	DN 200-250 FPM/NBR
Mätuttag	DN 200-250 Typ Oras, rostfritt stål, X2CrNiMo17-12-2 (1.4404) / NBR
Manövrering	DN 200-250 Ventil utrustad med manuell växel
Fläns	EN 1092-1 Tillgänglig PN 10, 16, 25, 40




Funktionsvillkor

-20 °C - +200 °C
Under -20 °C kontakta tillverkaren
Lägsta tillåtna omgivningstemperatur -40°C
Läckageklass A (EN 12266-1)

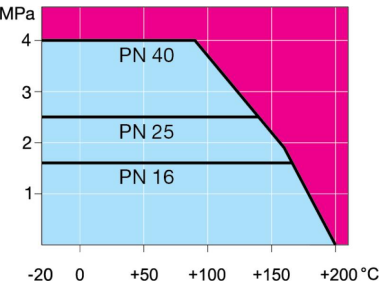


Ej för ånga

DN 200-300



DN 200-300

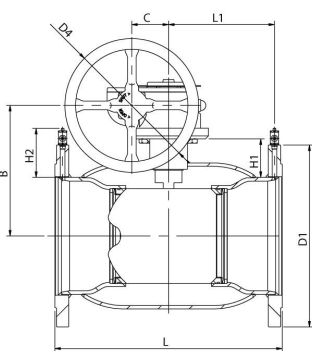

DN	PN	Product no.	RSK no.	A	B	C	D1	D2	D3	D4	E	H	H1	H2	L	L1	kg
200	16	243200	4891372	268	244	69	340.0	295.0	22.0	250.0	293		72	92	425	198	56.7
250	16	243250	4500418	301	294	97	405.0	355.0	26.0	300.0	345		88	97	550	259	103.9

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätdon, bland annat.