


# X-injusteringsventiler, stål, reducerat genomlopp

148X serie, X-serien, pressanslutning / pressanslutning, EN (DIN), DN 15-50 (18-54 mm), reducerat genomlopp

|                  |                                                                  |
|------------------|------------------------------------------------------------------|
| Ventilhus        | DN 15-50 Stål, P235GH (1.0345)                                   |
| Kula             | DN 15-50 Rostfritt stål, X5CrNi18-10 (1.4301), kompositflödesrör |
| Kultätning       | DN 15-50 PTFE+C                                                  |
| Spindel          | DN 15-50 Rostfritt stål, X8CrNiS18-9 (1.4305)                    |
| Spindeltätning   | DN 15-50 FPM                                                     |
| Mätuttag         | DN 15-50 Självförslutande, mässing / EPDM                        |
| Manövrering      | DN 15-50 med injusteringsratt                                    |
| Pressanslutnings | DN 15-50 CIIR                                                    |
| O-ring (LBP)     |                                                                  |

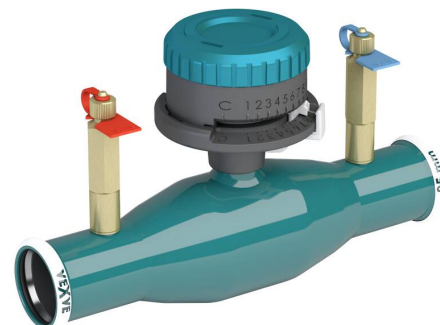


## Funktionsvillkor

-20 °C – +120 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

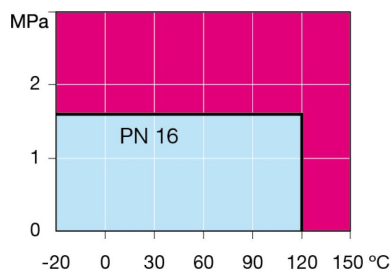

Ej för ånga

## DN 15-50

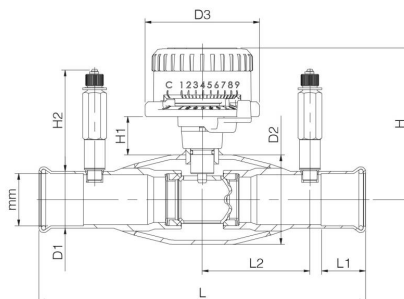

| DN | PN | Product no. | RSK no. | mm | D1   | D2   | D3   | H   | H1 | H2 | L   | L1 | L2 | kg  |
|----|----|-------------|---------|----|------|------|------|-----|----|----|-----|----|----|-----|
| 15 | 16 | 148015X     | 4883156 | 18 | 21.3 | 33.7 | 77.0 | 91  | 28 | 72 | 220 | 25 | 73 | 0.9 |
| 20 | 16 | 148020X     | 4883157 | 22 | 25.4 | 42.4 | 77.0 | 95  | 28 | 72 | 220 | 25 | 73 | 1.0 |
| 25 | 16 | 148025X     | 4883158 | 28 | 31.4 | 48.3 | 77.0 | 99  | 29 | 72 | 220 | 25 | 73 | 1.2 |
| 32 | 16 | 148032X     | 4883159 | 35 | 35.2 | 60.3 | 77.0 | 102 | 26 | 72 | 220 | 30 | 73 | 1.5 |
| 40 | 16 | 148040X     | 4883160 | 42 | 45.5 | 70.0 | 77.0 | 110 | 29 | 72 | 220 | 30 | 73 | 1.8 |
| 50 | 16 | 148050X     | 4883161 | 54 | 58.0 | 88.9 | 77.0 | 119 | 28 | 72 | 220 | 30 | 73 | 2.5 |

Vexves injusteringsventiler finns i biblioteken i TA-SCOPE och SmartBalancing-mätodon, bland annat.